



Applications

Baseboards, cabinets, door and window frames, skirting boards, exterior trim, and furniture manufacture

Features & Benefits


- Adjustable exhaust
- Soft handle grip
- No-mar pad
- Adjustable depth-of-drive
- Rear load magazine
- Restrictive trigger only

Clipped head framing nailer

Technical specifications

Dimension (LxWxH)	430x136x382 mm
Net weight	3,78 kg
Firing mode	Restrictive
Air inlet	3/8" female NPT
Operating pressure	4,8 - 8,3 bar
Air consumption (at 60 shots per minute)	274 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	85 dB
Sound power level (Lwa)	90 dB
Vibration level	2,5 m/s ²
Magazine capacity	80 pieces
Collation type 1	Paper collated
Collation angle	34 °

Fastener specification

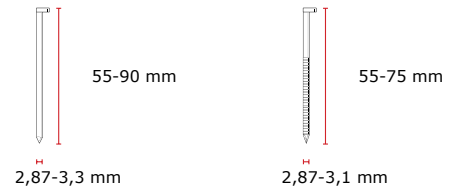

Description

S900FN, CH framing nailer

Art. Nr.

4F2311N

EAN code

8715274229423