



## **Gyproc FibaTape range**

High performance  
self-adhesive drywall  
joint tapes

# Gyproc FibaTape Selector

Application	Board edge	Standard environment				Humid/cold environment
		Dry rooms		Wet rooms		All rooms
		Wall	Ceiling	Wall	Ceiling	
Jointing	Square edges					
	Tapered edges					
Skimming	All					



**Gyproc FibaTape Classic**



**Gyproc FibaTape Xtreme**



**Gyproc FibaTape Mold-X**



**Gyproc FibaTape Perfect Finish**

## Product features

- Self-adhesive for easy application
- Faster jointing than paper tape
- Open fabric avoids blisters and bubbles
- C<sub>€</sub> Certified ETA-09/0075
- All rolls available in 90m x 48mm



# Gyproc FibaTape Classic



## Self-Adhesive Drywall Joint Tape

### Key features

- **Best reinforcing performance** - new coating is 70% superior to other fibre tapes and 25% more than paper tape
- **Faster jointing** - Self-adhesive backing gives a 30% time-saving compared to using paper tape
- **Perfect result** - avoids blisters and air bubbles

---

#### Typical application

Multi-purpose for tapered and square edge joints

#### Benefits

Best performing standard tape

---

# Gyproc FibaTape Xtreme



## Extra Sticky Drywall Joint Tape

### Key features

- **Extreme adhesion** - Increased glue to keep tape secure in humid or cold environments
- **Extreme temperatures** - Performs in temperatures of 5-35°C
- **Stronger joints** - Provides extra strength in changeable conditions

---

#### Typical application

Performs in extreme temperatures (5 - 35°C)

#### Benefits

Sticks to walls in all conditions

---

# Gyproc FibaTape Mold-X



## Mould Resistant Drywall Joint Tape

### Key features

- **Anti-mould** - Mould protection coating rated a perfect “10” on ASTM G 21-96 mould test
- **Greater protection** - Provides more protection than other joint tapes in moist environments making it perfect for wet rooms
- **Perfect compatibility** - Ideal for use with moisture resistant plasterboards

---

#### Typical application

Perfect for use on moisture resistant boards

#### Benefits

Micro-bacterial coating for mould protection

---

# Gyproc FibaTape Perfect Finish



## Ultra-Thin Drywall Joint Tape

### Key features

- **Thinner profile** - Over 30% thinner than standard paper tape and regular fibre tapes
- **Increased strength** - 50% tighter mesh for unparalleled durability
- **Ideal for ceilings** - A thinner profile requires less compound for easier feathering and sanding

---

#### Typical application


Easy to conceal square edge and butt edge joints

#### Benefits

Less feathering and sanding for a smoother finish

---

# Performance

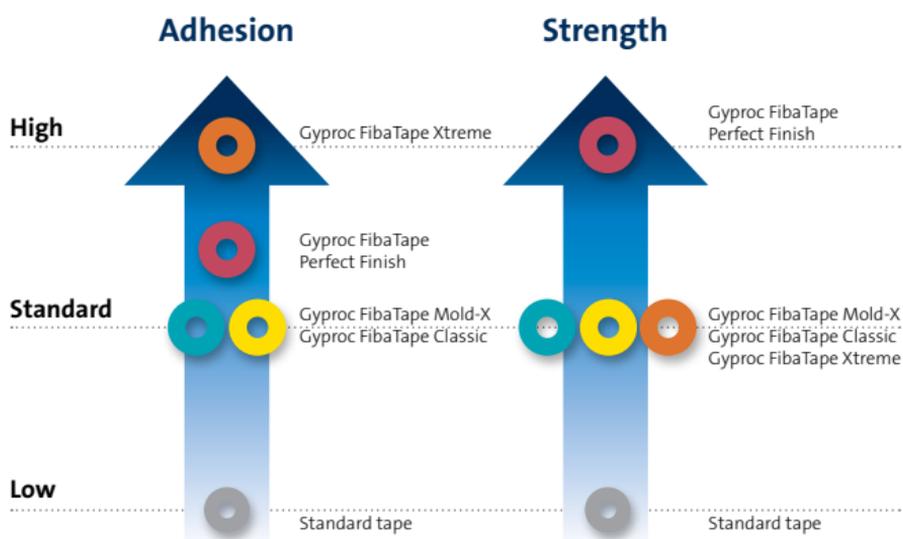

# Application




1. Ensure the surface is clean.

Position the tape over the joint.



2. Apply a layer of compound and allow to dry.

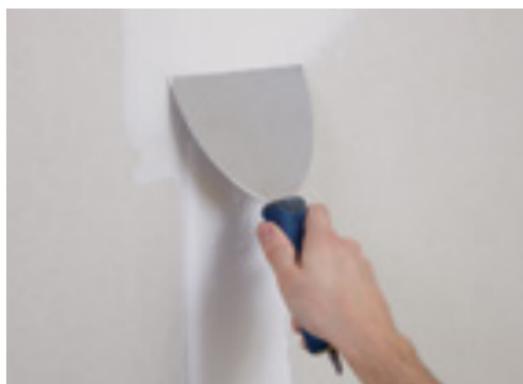

3. Sand if required.

Finish with a thin layer, feathering out another 150 - 200mm.

FibaTape is registered trademark of Saint-Gobain ADFORS © 2011

“Gyproc”, “Thistle”, “Gypframe” and “Glasroc” are all registered trademarks of BPB United Kingdom Limited. “Isover” is a registered trademark of Saint-Gobain Isover and “Artex” is a registered trademark of BPB United Kingdom Limited.

BPB United Kingdom Limited is a limited company registered in England under company number 734396, having its registered office at Saint-Gobain House, Binley Business Park, Coventry, CV3 2TT, UK. BPB United Kingdom Limited trades as British Gypsum for part of its business activities.

British Gypsum reserves the right to revise product specification without notice. The information herein should not be read in isolation as it is meant only as guidance for the user, who should always ensure that they are fully conversant with the products and systems being used and their subsequent installation prior to the commencement of work. For a comprehensive and up-to-date library of information visit the British Gypsum website at: [www.british-gypsum.com](http://www.british-gypsum.com). For information about products supplied by Artex Limited or Saint-Gobain Isover please see their respective websites.

“British Gypsum” is a registered trademark of BPB United Kingdom Limited.

[www.british-gypsum.com](http://www.british-gypsum.com)



EMS 543324



FM 550533

**Technical enquiries**

British Gypsum  
Technical Advice Centre  
East Leake  
Loughborough  
Leicestershire  
LE12 6HX

Telephone: 0844 800 1991  
Fax: 0844 561 8816  
Email: [bgtechnical.enquiries@bpb.com](mailto:bgtechnical.enquiries@bpb.com)

British Gypsum November 2014 AR-FIBATAPE-DL-14-01