



2,5mm flat smooth coilnail, galvanized, Sencoted

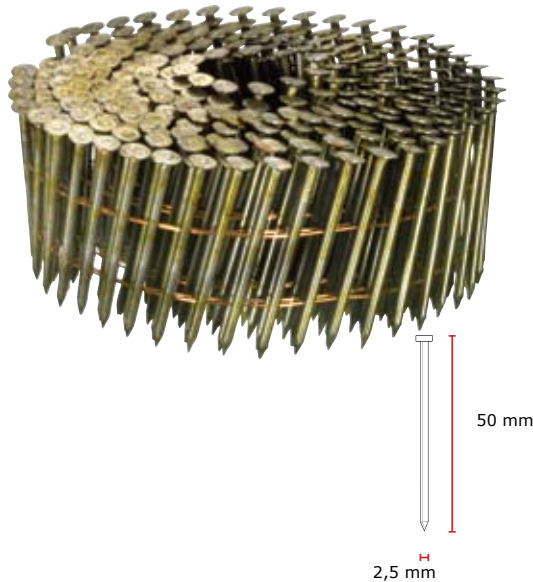

Applications

Framing, sheathing, pallets, subfloor, decks and trusses

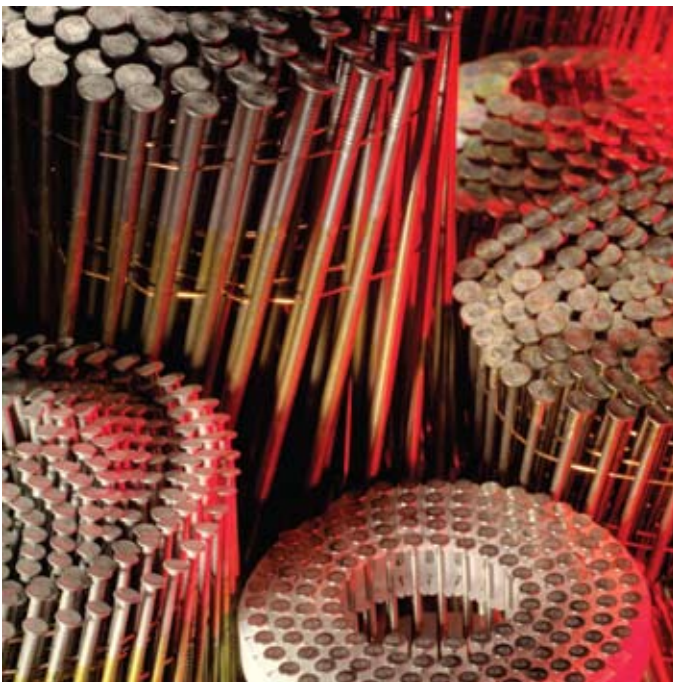

Technical specifications

| | |
|--------------------------------|-------------------------------------|
| Length | 50 mm |
| Min. length fastener 1 | 49,23 mm |
| Max. length fastener 1 | 51,25 mm |
| Fastener diameter 1 | 2,44-2,56 mm |
| Nominal diameter | 2,5 mm |
| Fastener head type 1 | Full round head |
| Head diameter | 6,35-6,98 mm |
| Pointangle (nominal) | 36° |
| Point type | Diamond |
| Amount fasteners on strip/coil | 275-275 pieces |
| Collation type 1 | Wire collated |
| Collation angle | 16° |
| Wounding type 1 | Flat |
| Wire material | Regular galvanized standard tensile |
| Finish | Sencoted |

Advanced technical specifications

| | |
|---|--------------------------------------|
| Number declaration of performance | VS-CPR-201305-S040 |
| Characteristic yield moment | 1575 Nmm |
| Characteristic withdrawal parameter paralel | 7,18 N/mm ² |
| Characterist head pull through parameter | 22,45 N/mm ² |
| Characteristic tensile strenght | 629 N/mm ² |
| Coating lenght | 37,5 mm |
| Head cross sectional area | 27 mm |
| Lenght of point | 3,9 mm |
| Coating type | Coating type 3 |
| Protection level in micron | ≤5 |
| CE fastener type | Round cross-section plain shank nail |
| Service class | 1 |

2,5mm flat smooth coilnail, galvanized, Sencoted**Logistic specifications****Primary packaging**

| | |
|-------------------------------|---------------|
| Primary packaging | Box |
| Quantity in primary packaging | 9900 |
| GTIN (Base unit of measure) | 8715274016542 |
| Gross weight | 20,424 kg |