


# ORBIT CCT

## ULTRA SLIM CCT SELECTABLE CIRCULAR DOWNLIGHTS

Orbit CCT recessed die cast aluminium circular downlights are available in outputs from 500lm to 1720lm with selectable colour temperatures 3000K / 4000K / 6000K. Featuring an ultra-slim profile of 15mm, Orbit is highly suited to projects where cost is a prime consideration.

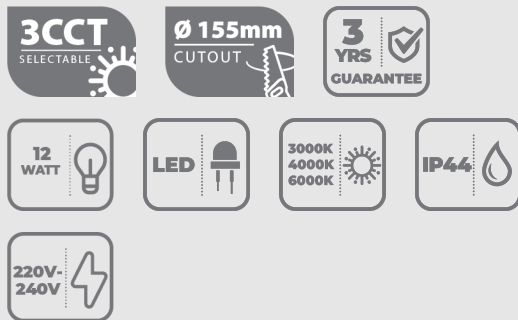

### Features

- Ultra slim profile to fit virtually any ceiling void
- Selectable CCT - 3000K, 4000K, 6000K
- Emergency option available
- Die-cast aluminium body and TP(b) diffuser
- Supplied c/w pre-wired remote driver with plug and socket connectors

### Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
ORB12-CCT	Orbit Circular Downlight 12W 3CCT 3/4/6K	900 lm		12	75 lm/W

### Product Information

Guarantee	3 Years	Colour Finish	White RAL9003
Colour Appearance (CCT)	3000 / 4000 / 6000K	LED Life Expectancy	L70B50 97,000 Hours
IP Rating	IP44 (from below ceiling)	Power Factor	>0.9
IK Rating	IK04	Frequency	50/60Hz
Voltage	220 - 240	Driver Type	Fixed Output
Material (Body/Housing)	Die-Cast Aluminium	Approval	UKCA CE
Material (Diffuser/Cover)	TP(b) Styrene	Electrical Class	Class II
Colour Rendition (CRI)	>80	Working Temperature	-10°C to 50°C



# ORBIT CCT

## ULTRA SLIM CCT SELECTABLE CIRCULAR DOWNLIGHTS

### Packaging Information

Dimensions (mm)	Ø: 170 x D: 15 mm
Barcode	5055807627290
Box Dimensions (mm)	L: 202 x W: 173 x D: 31 mm
Units/Outer Carton	20

Outer Carton Barcode	15055807627297
Outer Carton Dimensions (mm)	L: 420 x W: 330 x D: 193 mm

