


Starter/Cavity Starter Ties

Cavity starter tie, used to connect an existing wall to a new external skin incorporating a new cavity.

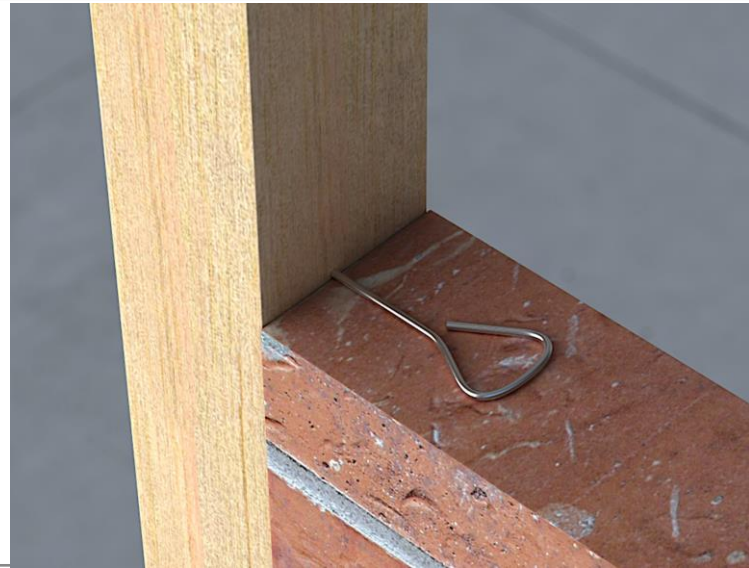

Product

SSFT Starter Frame Tie

SSFT Starter Frame Tie. Used for fixing timber door and window frames to brickwork by building into mortar courses as construction progresses

Sizes:

130mm

200 per Box

Performance

| SSFT-225-STST | |
|---------------------------------------|---------------|
| Compressive Load Capacity | 2260N |
| Tension Load Capacity at Mortar End | 2076N |
| Tension Load Capacity at Threaded End | 2050n |
| Minimum Embedment | 62.5mm |
| Minimum Mortar Joint | 10mm |

Safety Precautions

SSFT Starter Frame Ties are manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.