

HM SERIES - HYDRAULIC JACKS

The HM Series of Hydraulic Jacks can be used for repairs, maintenance and installation of heavy machines.

Compact and stable construction.

Can be used in any position.


Housing revolves 360 degrees.

Lowering speed can be accurately adjusted.

Protected against overloading.

Pump lever is removable.

According to CE and US standard USA ASME/ANSI B 30.1.1986

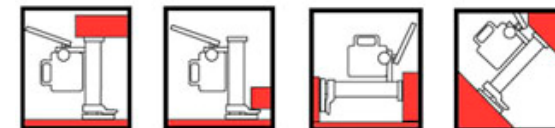

Type	Capacity (tonne)	Lift Range of Foot (mm)	Lifting Range of Head (mm)	Max Lever Force (kg)	Weight (kg)
HM50	5	25-230	368-573	38	25
HM100	10	30-260	420-650	40	35
HM250	25	58-273	505-720	40	102