


Movement ties

This range of ties allow masonry walls to be tied back to other structures (steelwork or masonry) providing restraint in one direction but allowing movement in the other. This is achieved by placing a debonding sleeve over the part of the tie which is to be embedded in the wall allowing the tie to move within the sleeve. These ties are also used in movement joints where they occur in long runs of brickwork. The ties span over a vertical joint preventing vertical movement but allowing horizontal expansion and contraction.



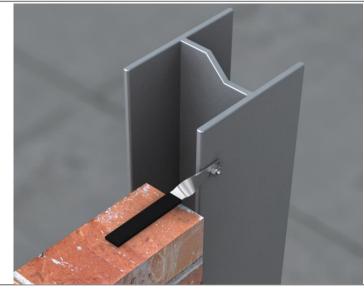

Product V63PE Plain End Clasp Tie

Used for side fixing a steel column to masonry whilst allowing lateral movement. (Sleeve supplied as extra). Each size is supplied with 250 units per box.

| Sizes: | 150mm | 250mm |
|--------|-------|-------|
| | 175mm | 275mm |
| | 200mm | 300mm |
| | 225mm | |

Performance

| V63PE 150mm-300mm | | |
|----------------------|-------|--|
| Shear Load Capacity | 1180N | |
| Minimum Mortar Joint | 10mm | |

Safety Precautions

V63PE Plain End Clasp Ties are manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.

Head Office: Vista Engineering Ltd, Carr Brook Works, Elnor Lane, Whaley Bridge, High Peak SK23 7JN Tel: Sales: +44 (0) 1663 736 700 Fax: +44 (0) 1663 736 710 Scotland Office: Vista Engineering Ltd, 79 Dunn Street, Parkhead, Glasgow, G40 3PA Tel: +44 (0) 141 613 3144 Fax: +44 (0) 141 613 3031

