


HARVARD UGR19

UGR19 LINEAR TWIN BATTEN

UGR<19 Harvard is a modern and minimalistic linear twin batten designed for indoor applications requiring low glare. Designed specifically for classrooms, and office environments with visual comfort in mind. With selectable CCT and power, high efficacy of 120lm/w, 7 year warranty and plug and play capability.

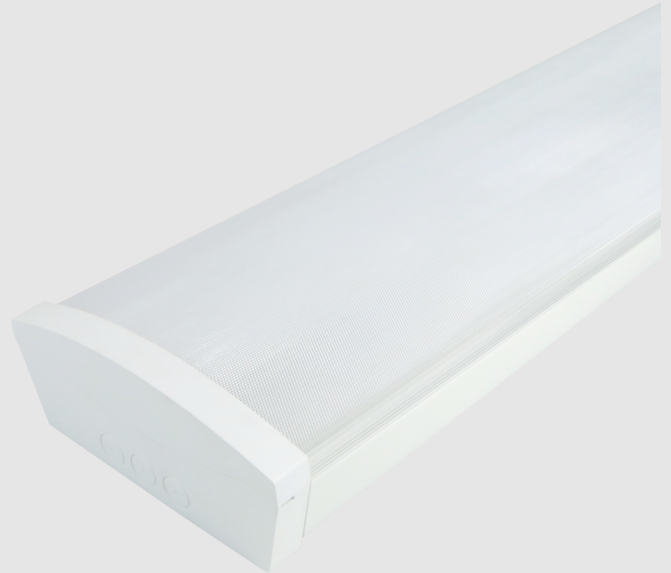

Features

- Features Plug & Play Emergency and Microwave Sensors
- 7 Year Warranty
- Can be suspended or Surface Mounted
- UGR<19

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
HARS/27-47/3CCT/UGR19	Harvard Batten, 1500mm, 27-47W, 3 CCT, UGR<19	3240lm 4080lm 4800lm 5760lm		27W 34W 40W 47W	120 lm/W

Product Information

Warranty	7 Years
On-Site Warranty	2 Years
Colour Appearance (CCT)	3000K 4000K 6500K
IP Rating	IP20
IK Rating	IK08
Voltage	180-264V
Material (Body/Housing)	Steel

Colour Finish	White RAL9003
LED Life Expectancy	L70B50 170,000 Hours
Power Factor	0.95
Frequency	50/60Hz
Driver Type	Fixed
Approval	UKCA CE
Electrical Class	Class I

Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra >80

Working Temperature	-20°C to 60°C
---------------------	---------------

SURFACE & SUSPENDED SPECIFICATION SHEET





HARVARD UGR19

UGR19 LINEAR TWIN BATTEN

Packaging Information

Dimensions (mm)	L: 1478 x W: 205 x H: 87 mm
Product Net Weight (kg)	3 kg
Barcode	5055807626804
Box Dimensions (mm)	L:1490 x W: 210 x D: 90 mm
Box Gross Weight (kg)	3.4 kg

Units/Outer Carton	6
Outer Carton Barcode	15055807626801
Outer Carton Dimensions (mm)	L:1505 x W: 430 x D: 285 mm
Outer Carton Gross Weight (kg)	21.4 kg

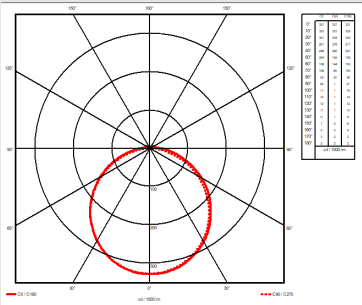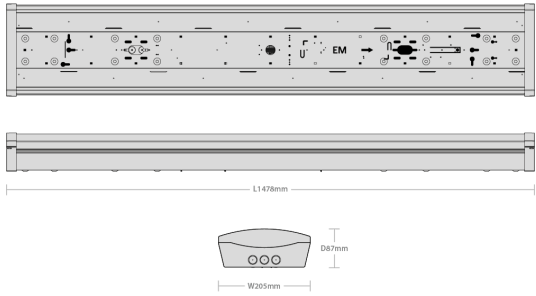

ENERGY

Red Arrow
HAR5/27-47/3CCT/UGR19

A
B
C **C**
D
E
F
G

27 - 47
kWh/1000h

2021 No. 1035
5055807626804