


Remedial Ties

A product range used in existing cavity walls where wall ties have been omitted or have corroded.



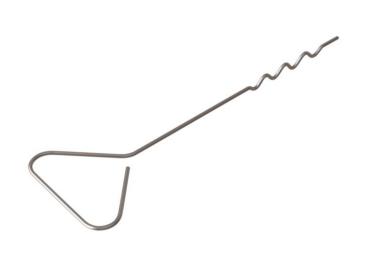

Product V30 Wavy Tail Ties

These products allow the introduction of a cavity tie into a sitation where no ties are present. These stainless steel 'wavy' tail ties are used for remedial applications and available in lengths of 150mm-300mm. They are designed for use in conjunction with Vista resins.

Sizes:	
150mm	250mm
175mm	275mm
200mm	300mm
225mm	

Test Results

Tested to BS DD 140 Part 2 `987 Exceeding the requirements for a type 2 (medium duty) tie when used with a suitable resin. Material: Grade 18/8, 304 austenitic stainless steel to BS 1554

Features

Applications – Allows the introduction of a cavity tie into a situation where no ties are present. Used for remedial applications. **Design** – 'wavy' tail ties available in lengths of 150-300mm.

Behaviour in relation to fire – non combustible (as defined in the National Building Regulations). **Durability** – excellent corrosion resistance and a service life of not less than 60 years.

Safety Precautions

V30 Wavy Tail Ties are manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.

Head Office: Vista Engineering Ltd, Carr Brook Works, Elnor Lane, Whaley Bridge, High Peak SK23 7JN Tel: Sales: +44 (0) 1663 736 700 Fax: +44 (0) 1663 736 710 Scotland Office: Vista Engineering Ltd, 79 Dunn Street, Parkhead, Glasgow, G40 3PA Tel: +44 (0) 141 613 3144 Fax: +44 (0) 141 613 3031

