



5.5L MANUAL VACUUM OIL & FLUID EXTRACTOR PUMP

MODEL NO: **TP696**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions



Wear protective gloves



Wear eye protection



Wear protective clothing

1. SAFETY

- ✓ Keep the extractor clean and maintain it in good condition (use an authorised service agent).
- ✓ Replace or repair damaged parts. Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.
- ✓ Keep all non-essential persons away from the work area.
- ✓ Check extractor connections and fittings before use.
- ✓ Ensure that the tank capacity exceeds the amount of fluid to be collected.
- ✗ **DO NOT** use the extractor for any purpose other than that for which it is designed.
- ✗ **DO NOT** operate the extractor if any parts are damaged or missing as this may cause failure and/or personal injury.
- ✗ **DO NOT** leave the extractor operating unattended.
- **WARNING!** Engine oil will be hot when extracting.
- **IMPORTANT!** Ensure that you wear protective clothing, gloves, goggles, face mask as appropriate for the fluid being extracted.
- **WARNING! DO NOT** allow uncontrolled discharge of fluids thus polluting the environment.
- ✗ **DO NOT** use the unit to extract dangerous chemicals, poisons, acids, alkalines or solvents.
- ✗ The container is not designed for long term storage.
- ✗ **DO NOT** store the unit under extreme conditions.
- ✗ **DO NOT** turn the container upside-down when it is holding fluids.
- ✗ **DO NOT** adapt the unit for any other purpose.
- ✓ Dispose of waste fluids in accordance with local authority regulations.
- **WARNING! DO NOT** use with gasoline or other flammable liquids.
- ✓ When not in use, disconnect from the air supply and store in a safe, dry, childproof area.



2. INTRODUCTION

Constructed from composite materials and suitable for the extraction of engine oils from cars, motorcycles, marine engines, stationary engines and industrial machinery. Also suitable for low viscosity fluids such as water. Supplied with 2.1m suction probe, easy-pour spout and cover cap. Use probe to remove engine oil through the dipstick tube.


3. SPECIFICATION

MODEL NO:	TP696
Capacity:	5.5L
Nett Weight:	1.27kg
Suction Probes:	2.1m

4. ASSEMBLY

NOTE: The black section of the probe is permanently joined to the clear section and cannot be separated.

- 4.1. Screw handle (F) onto pump shaft (B).
- 4.2. Replace red cap on container (G) with tube cap (D) and fix firmly.
- 4.3. Before attaching pump (B), make sure the black rubber collar (E) on container(A) is firmly seated.

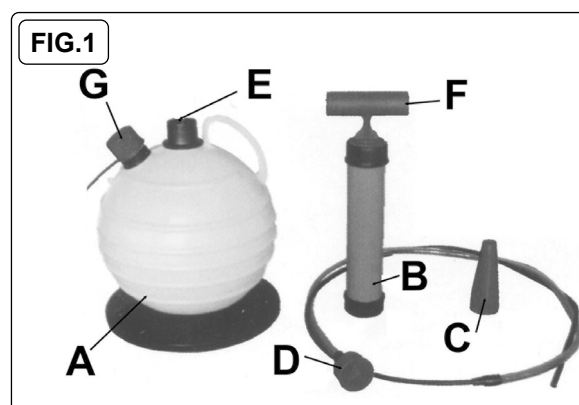

5. OPERATION

- 5.1. Pre-run engine for 10 minutes, to warm the oil and to allow any sludge or contaminants within the oil to mix and to suspend.
- 5.2. Switch engine off and remove dipstick from vehicle.
- 5.3. Insert black part of suction probe into vehicle dipstick pipe until it reaches the bottom of the oil pan.
- 5.4. With two hands pump handle (F) 10 to 20 times. Oil will flow out automatically.
- × **DO NOT PUMP CONTINUOUSLY- DO NOT FORCE THE PUMP HANDLE.**
- 5.5. After extracting, remove tube cap (D) from container with a twisting action.
- 5.6. Remove pump (B) from container (A), attach pour spout (C) and empty oil (fluid) into a suitable receptacle for safe disposal. **DO NOT** hold the container upside-down.

6. MAINTENANCE

- 6.1. Keep the unit clean, wipe off any fluid spillage. Keep the suction tubes clean and clear of blockages. Check that all tubes, hoses and connections are in good condition.



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR
PURCHASE HERE

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



sales@sealey.co.uk



www.sealey.co.uk